



LITEPAD LOOP™

PRODUCT DESCRIPTION

LitePad Loop is an innovative, easy to use ring light that quickly installs around the lens of a camera for on-axis lighting. The light engine within the Loop is Rosco LitePad which is well known for its flattering, indirect light output. LitePad fixtures are widely used in film and video production because of this quality. Its innovative mounting assembly makes the LitePad Loop easy to install onto any camera – including film, video, and DSLR units. LitePad Loop is available individually and also comes in a Pro Kit. The Kit includes additional power and mounting accessories for users that need maximum flexibility and control from their ring lights.



LITEPAD LOOP: 291088750BOX

LitePad Loop
Mounting Assembly
2.5 Amp Multi-Blade Transformer
Right Angle 10ft (3m) Extension Cable
Safety Cord, Safety Thumb Screw, and Allen Key
Pull String Storage Pouch

LITEPAD LOOP PRO KIT: 291088750KIT

LitePad Loop with Mounting Assembly
2.5 Amp Multi-Blade Transformer
Right Angle 10ft (3m) Extension Cable
8" Rods and 4" L-Bracket
Single Fader Dimmer
Loop AA Battery Kit
Loop Color Filter Pack
Light Stand Plate
Safety Cord, Safety Thumb Screw, and Allen Key

ACCESSORY ITEM NUMBERS

291636510812	LitePad Loop AA Battery Kit	291600010014	LitePad Loop 4" L-Bracket Kit
291103050101	LitePad Loop Anton/Bauer w/ Cheeseplate	291600040002	LitePad Loop Light Stand Plate
291103050102	LitePad Loop V-Mount Bracket w/ Cheeseplate	291200000008	LitePad Loop Color Pack
291200030208	LitePad Loop 8" Rods	291200001008	LitePad Loop Light Masks




52 Harbor View Avenue, Stamford, CT 06902 • (203)708-8900 • 1(800)ROSCO NY • Fax: (203)708-8919
1265 Los Angeles Street, Glendale, CA 91204 • (818)543-6700 • 1(800)ROSCO LA • Fax: (818)662-9470
Also in: Toronto, London, Madrid, São Paulo and Sydney

DIMENSIONS & WEIGHT

Dimensions: 9.1" (231mm) Diameter x 1.3" (33mm) Depth

Weight: 2.4 lbs (1.1kg)

PHOTOMETRICS

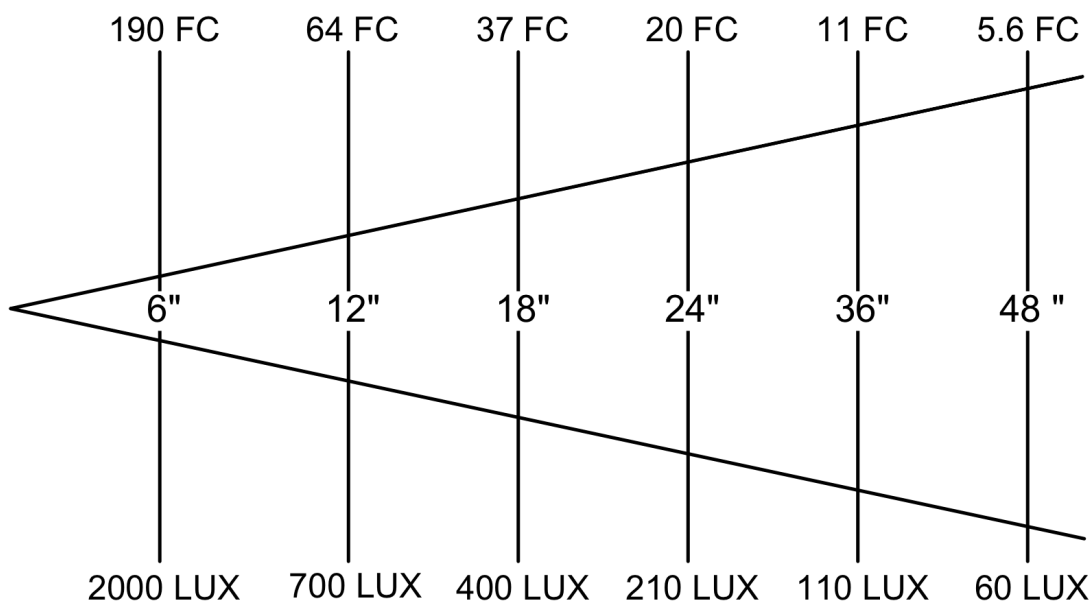

ATTRIBUTES AND POWER

Color Temperature (Approximate): 5,800°K

Power: 12V DC Input (Global Transformer)

Power Consumption: 24 Watts (2A at 12V DC)

Lamp Life: 60,000 hrs

Operating Temperature: -22°F - +185°F (-30°C - +85°C)

