




**COLOR FILTER TECHNICAL DATA SHEET**

SWATCHBOOK: PERMACOLOR  
 COLOR FILTER: #4630 HOT PINK  
 DESCRIPTION: Permanent Color Filter  
 MAX. TRANS.: 87%

**COLORIMETRIC DATA**

OBSERVER: CIE 1931 10 Degree  
 SOURCE: • 'A' (tungsten)  
 • 'D65' (daylight)

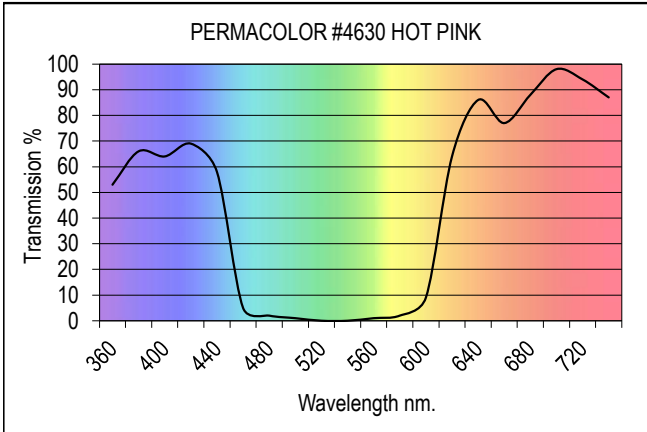


HUNTER LAB SOURCE A	
L*	38.854
A*	67.925
B*	-12.529

HUNTER LAB SOURCE D65	
L*	29.938
A*	81.723
B*	-34.87

CIE 1964 10° SOURCE A	
Y	10.574
(x)	0.607
(y)	0.259

CIE 1964 10° SOURCE D65	
Y	6.211
(x)	0.387
(y)	0.144

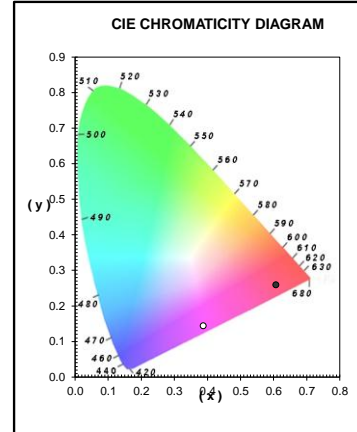

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	53	66	64	69	58	5	2	1	0	0	1	2	9	64	86	77	88	98	94	87

**MATERIAL SPECIFICATIONS:**

General Description: Dichroic Coated Glass Filter  
 Substrate: Borosilicate  
 Thickness: 1.75mm  
 3.3mm and 1.1mm also available  
 Manufactured in: U.S.A

**AVAILABLE SIZES:**

Call  
 Almost any size/shape available